



# Xfin Blade

## Xfin Blade

Base Station · Trunk Controller · IP Softswitch.

Digital IP Trunking in a Single 1U Product




The core of the Xfin system is the Xfin Blade unit. Each single channel Blade unit is a replicable system component which when connected together enables the construction of single or a multi site Xfin Systems, dependant upon the software option selected. Xfin IP Soft Switch connectivity between Xfin Blades enables up to 32 channel units at a single site and up to 300 networked sites.

### IP Soft Switching

Xfin IP soft switching leverages IP Multicast technology which enables network traffic to be delivered to multiple recipients without adding any additional burden to the network. It is this capability that enables the broadcast functionality common in radio communication such as Group Calling to be readily handled within the IP environment.

### System Management

A powerful Windows XP programming package enables remote system configuration and diagnostics, call logging and management reporting. Auto-population database and high speed configuration downloads over Ethernet enable highly effective and rapid management either on or offline whilst diagnostics and reporting data can be exported to reporting tools.

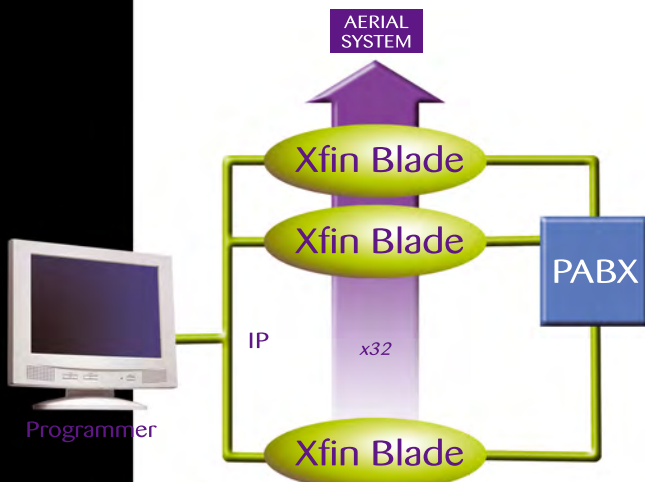



## 1. Features

- ✂ MPT1327 standard with terminal inter-operability.
- ✂ Dedicated & non-dedicated control channel.
- ✂ Lone worker (without the PC Dispatcher).
- ✂ Subscriber management (registration, access levels, white list, unit barring, ESN check).
- ✂ Voice calls (group, broadcast, emergency & priority)
- ✂ Channel pooling.
- ✂ 1 to 32 channels.
- ✂ 9,000 subscribers.
- ✂ 1000 groups.
- ✂ 70 fleets.
- ✂ Telephone interconnect for every channel.
- ✂ Call queuing, pre-emption & diversion.
- ✂ Data (status, short & non-prescribed).

## 2. Base Station

- ✂ Fully integrated
- ✂ 1W to 100W, 100% duty cycle
- ✂ 12.5 & 25kHz channel spacing
- ✂ 66MHz to 530mHz

Frequency response	+1dB to -3dB pre-emph 300-3000Hz (25kHz), 300-2500Hz (12.5kHz)	
Stability	± 2.0ppm	
Intermodulation	>40dB Tx	>70dB Rx
Hum and noise	>40dB (12.5kHz)	>45dB (25kHz)
Tx rise time	<25ms	
Sensitivity	≥ 12dB SINAD for 0.3μV <sub>pd</sub> (12.5kHz)	
Audio response	±3dB de-emph 300-2550Hz (12.5kHz with CTCSS)	
Distortion	<5%	
Blocking	>95dB at ±1MHz	

## 3. General

Software Options	Single site or multisite options		
Modulation	Freq. F3E (voice) pre-emphasized/flat, or FFSK data (1200 or 2400bps)		
Frequency Bands	E0: 66-88MHz. KM: 208-245MHz. TK: 400-450MHz. WR: 470-530MHz.	AC: 136-174 R0: 310-350 TU: 400-480	MHz. K1: 174-208MHz. MHz. R1: 335-375MHz. MHz UW: 440-500MHz.
Temperature	-25°C to +55°C Operating (Full Spec.) -40°C to +80°C Storage		
Antenna Connect	2 x 50Ω female N-type		
Environmental	IP20 ingress protection, Humidity <95% non-condensing		
Inputs/Outputs	Serial interface with 1x audio connection (RJ45 – front panel) 2x line/audio (2/4-wire) with E&M signalling (2x RJ45 with internal shield) Programmable facilities connector (37 way D-type) 2x RS232 serial connections (9 way D-type, RJ45 with internal shield) Ethernet IP interface (10/100 base-T magnetic RJ45 with external shield) USB connector (Type-B USB Socket) PSTN connector (6/4 RJ-11 socket)		
Type Approval	CE Type approvals to R&TTE Directive 1999/05/EC: EN300-086 Radio, EN300-113 Data, EN301-489-05 EMC, EN300-219 Signal, EN60950 Safety, TBR15, 17 and 21 Line		
Dimensions	44mm(1U) High x 437mm Wide x 450mm Deep (Excluding cables and ears)		
(In Wall Mount)	125mm High x 465mm Wide x 470mm Deep		
Weight	6.95 kg		

For additional information on this or any other Team Simoco product, visit our web site at:  
[www.teamsimoco.com](http://www.teamsimoco.com)

Due to our policy of continuous improvement of our products and services, technical specifications and claims, correct at the time of going to print, may be subject to variation without prior notice. Team Simoco has endeavoured to ensure that the information in this document is correct and fairly stated, but does not accept liability for any error or omission.

Team Simoco Ltd  
Field House  
Uttoxeter Old Road  
Derby DE1 1NH  
England

Tel: +44 (0) 1332 375500  
Fax: +44 (0) 1332 375666

© Team Simoco 2007

