


# N-C

## noise-com<sup>®</sup> unit



The SAVOX<sup>®</sup> noise-com is a smart, flexible and cost effective hands-free com-solution for high-noise environments. The SAVOX<sup>®</sup> noise-com increases both personal safety and work efficiency. It fits in almost any muff type of hearing protectors, turning them into a professional communication headset. Still it maintains the function of the hearing protector. The SAVOX<sup>®</sup> noise-com is light weight, durable and intrinsically safe (ATEX Approved) and it connects directly or through a SAVOX<sup>®</sup> com-control/PTT unit to most types of two-way radios/phones.

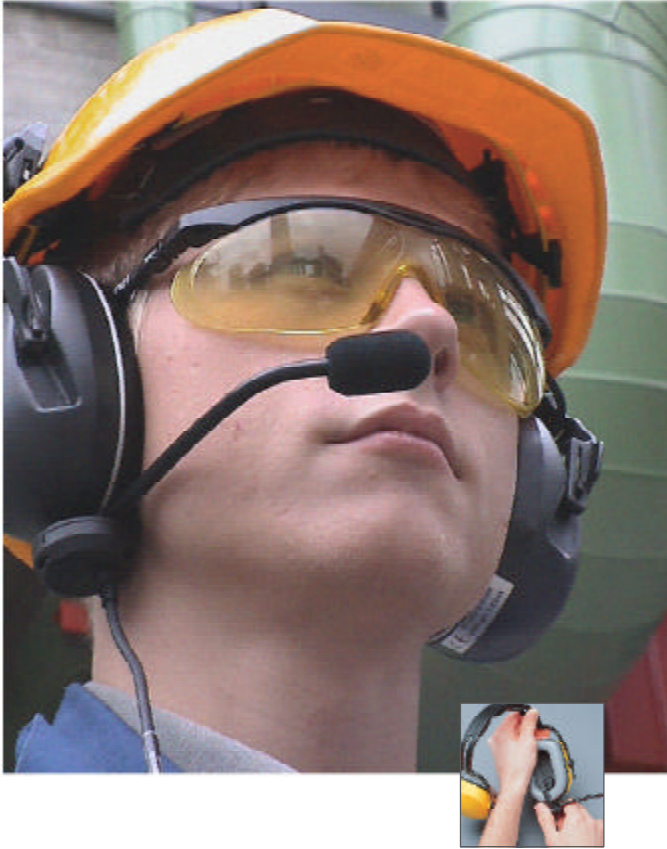

### Specifications

Weight	81g
Size	70 x 175 mm
Microphone	supply voltage 2.5...10,0 VDC directivity noise cancelling impedance 2500 ohm @1 kHz
Speaker	impedance 360 ohm @1kHz (±15%)
Cable	coiled, Ø 4mm, 270mm (PUR)
Connector	4-pole, quick release plug (SAVOX <sup>®</sup> NC)
Operation temperature	-25...+63 °C,(continuous)
Supply voltage	2,5...10,0 VDC
Humidity	95%RH,+63 °C for 500 hours
ESD, EMI immunity	confirms with the EN 301 489-1
Options	SAVOX <sup>®</sup> NC compatible with most SAVOX <sup>®</sup> com-control/push-to-talk units (ATEX Approved) SAVOX <sup>®</sup> NC Direct with integrated PTT and radio/phone specific connector



SAVOX<sup>®</sup> is a trademark of SAVOX Communications Ltd. Doc. nr: D30306A. We reserve the rights to changes.

SAVOX Communications Ltd  
Vitikka 4, FIN-02630 ESPOO, FINLAND  
Phone: +358 (0)9 417 411 00  
Fax: +358 (0)9 417 411 40  
savox@savox.com, www.savox.com

  
**Bridge Systems**

  
**SAVOX**